

# SFP-CWGExx-80C

1.25Gbps SFP CWDM Transceiver, Single Mode, 80km Reach



#### **Product Features**

- Supports up to 1.25Gbps bit rates
- Hot-pluggable SFP footprint
- ❖ CWDM DFB laser and PIN photo detector, Up to 80km for SMF transmission
- ❖ Compliant with SFP MSA and SFF-8472 with duplex LC receptacle
- Compatible with RoHS
- Single +3.3V power supply
- Real Time Digital Diagnostic Monitoring

FIBER MALL CO., LIMITED Rev 1.1 PAGE 1/10



Operating case temperature:

Standard: 0 to +70°C Industrial: -40 to +85°C

#### **Applications**

1.25Gbps Optical systems

Gigabit Ethernet

1.063Gbps Fiber Channel


Other Optical links

#### **Description**

The SFP transceivers are high performance, cost effective modules supporting data rate of 1.25Gbps and 80km transmission distance with SMF.

The transceiver consists of three sections: a CWDM DFB laser transmitter, a PIN photodiode integrated with a trans-impedance preamplifier (TIA) and MCU control unit. All modules satisfy class I laser safety requirements.

The transceivers are compatible with SFP Multi-Source Agreement and SFF-8472 digital diagnostics functions.

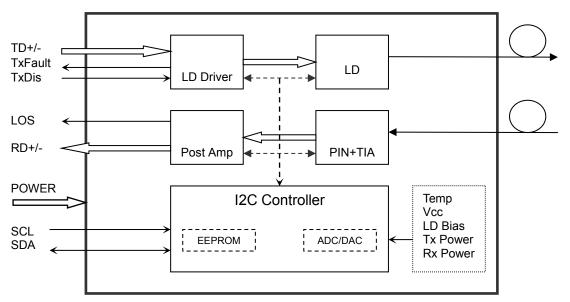

Transceiver functional diagram

FIBER MALL CO., LIMITED Rev 1.1 PAGE 2 / 10



## **Absolute Maximum Ratings**

Parameter	Symbol	Min	Max	Unit
Supply Voltage	Vcc	-0.5	4.5	V
Storage Temperature	Ts	-40	+85	°C
Operating Humidity	-	5	85	%

## **Recommended Operating Conditions**

Parameter		Symbol	Min	Typical	Max	Unit
	Standard		0		+70	°C
Operating Case Temperature	Extended	Тс	-20		+80	°C
·	Industrial		-40		+85	°C
Power Supply Voltage		Vcc	3.135	3.30	3.465	V
Power Supply Current		Icc			300	mA
Data Ra	ate		0.1	1.25		Gbps

FIBER MALL CO., LIMITED Rev 1.1 PAGE 3/10



## **Optical and Electrical Characteristics**

Param	neter	Symbol	Min	Typical	Max	Unit	Notes
			Transm	itter			
Centre Wa	velength	λc	λс-6.5	λς	λc+6.5	nm	
Spectral Widt	h (-20dB)	Δλ			1	nm	
Side-Mode Sup	pression Ratio	SMSR	30		-	dB	
Average Out	tput Power	P <sub>out</sub>	0		+4.0	dBm	1
Extinctio	n Ratio	ER	9.0			dB	
Data Input Swir	ng Differential	V <sub>IN</sub>	180		1200	mV	2
Input Differentia	al Impedance	Z <sub>IN</sub>	90	100	110	Ω	
TX Disable	Disable		2.0		Vcc	V	
1 A DISAble	Enable		0		0.8	V	
TX Fault	Fault		2.0		Vcc	V	
TX Fault	Normal		0		0.8	V	
			Receiv	ver			
Centre Wa	velength	λc	1270		1610	nm	
Receiver S	ensitivity				-26	dBm	3
Receiver (	Overload		-1			dBm	3
LOS De-	-Assert	LOS <sub>D</sub>			-27	dBm	
LOS A	LOS Assert		-38			dBm	
LOS Hys	LOS Hysteresis		0.5		4	dB	
Data Output Sw	ing Differential	Vout	600	800	1000	mV	4
1.0	c	High	2.0		Vcc	V	
LO	<b>5</b>	Low			0.8	V	

#### Notes:

- 1. The optical power is launched into SMF.
- 2. PECL input, internally AC-coupled and terminated.
- 3. Measured with a PRBS 2<sup>7</sup>-1 test pattern @1250Mbps, BER ≤1×10<sup>-12</sup>.
- 4. Internally AC-coupled.



## **Timing and Electrical**

Parameter	Symbol	Min	Typical	Max	Unit
Tx Disable Negate Time	t_on			1	ms
Tx Disable Assert Time	t_off			10	μs
Time To Initialize, including Reset of Tx Fault	t_init			300	ms
Tx Fault Assert Time	t_fault			100	μs
Tx Disable To Reset	t_reset	10			μs
LOS Assert Time	t_loss_on			100	μs
LOS De-assert Time	t_loss_off			100	μs
Serial ID Clock Rate	f_serial_clock		100	400	KHz
MOD_DEF (0:2)-High	V <sub>H</sub>	2		Vcc	V
MOD_DEF (0:2)-Low	VL			0.8	V

## **Diagnostics**

Parameter	Parameter Range		Accuracy	Calibration	
	0 to +70				
Temperature	-20 to +80	°C	±3°C	Internal	
	-40 to +85				
Voltage	3.0 to 3.6	V	±3%	Internal	
Bias Current	0 to 100	mA	±10%	Internal	
TX Power	-1 to +4	dBm	±3dB	Internal	
RX Power	-26 to -1	dBm	±3dB	Internal	




### **Digital Diagnostic Memory Map**

The transceivers provide serial ID memory contents and diagnostic information about the present operating conditions by the 2-wire serial interface (SCL, SDA).

The diagnostic information with internal calibration or external calibration all are implemented, including received power monitoring, transmitted power monitoring, bias current monitoring, supply voltage monitoring and temperature monitoring.


The digital diagnostic memory map specific data field defines as following.

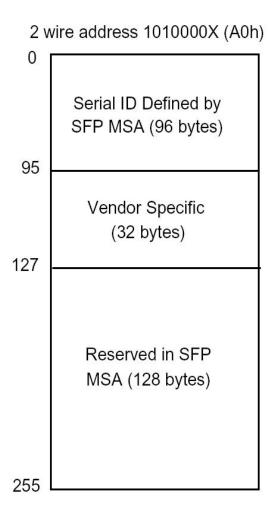

	wire address 1010001X (A2h	1)
55	Alarm and Warning Thresholds (56 bytes)	
95	Cal Constants (40 bytes)	
	Real Time Diagnostic Interface (24 bytes)	
119 127	Vendor Specific (8 bytes)	
	User Writable EEPROM (120 bytes)	
247		
255	Vendor Specific (8 bytes)	



## **Pin Descriptions**

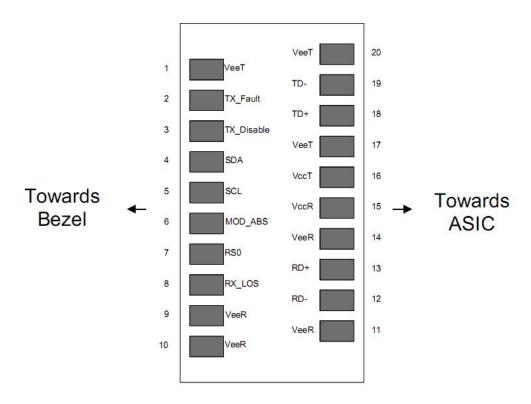

Pin	Signal Name	Description	Plug Seq.	Notes
1	V <sub>EET</sub>	Transmitter Ground	1	
2	TX FAULT	Transmitter Fault Indication	3	Note 1
3	TX DISABLE	Transmitter Disable	3	Note 2
4	SDA	SDA Serial Data Signal	3	
5	SCL	SCL Serial Clock Signal	3	
6	MOD_ABS	Module Absent. Grounded within the module	3	
7	RS0	Not Connected	3	
8	LOS	Loss of Signal	3	Note 3
9	V <sub>EER</sub>	Receiver ground	1	
10	V <sub>EER</sub>	Receiver ground	1	
11	V <sub>EER</sub>	Receiver ground	1	
12	RD-	Inv. Received Data Out	3	Note 4
13	RD+	Received Data Out	3	Note 4
14	V <sub>EER</sub>	Receiver ground	1	
15	V <sub>CCR</sub>	Receiver Power Supply	2	
16	V <sub>ССТ</sub>	Transmitter Power Supply	2	

FIBER MALL CO., LIMITED Rev 1.1 PAGE 7 / 10




17	V <sub>EET</sub>	Transmitter Ground	1	
18	TD+	Transmit Data In	3	Note 5
19	TD-	Inv. Transmit Data In	3	Note 5
20	V <sub>EET</sub>	Transmitter Ground	1	

#### Notes:

Plug Seq.: Pin engagement sequence during hot plugging.


- 1) TX Fault is an open collector output, which should be pulled up with a 4.7k~10kΩ resistor on the host board to a voltage between 2.0V and Vcc+0.3V. Logic 0 indicates normal operation; Logic 1 indicates a laser fault of some kind. In the low state, the output will be pulled to less than 0.8V.
- 2) Laser output disabled on TDIS >2.0V or open, enabled on TDIS <0.8V.
- 3) LOS is open collector output. Should be pulled up with  $4.7k\sim10k\Omega$  on host board to a voltage between 2.0V and 3.6V. Logic 0 indicates normal operation; logic 1 indicates loss of signal.
- 4) RD-/+: These are the differential receiver outputs. They are internally AC-coupled 100 differential lines which should be terminated with  $100\Omega$  (differential) at the user SERDES.
- 5) TD-/+: These are the differential transmitter inputs. They are internally AC-coupled, differential lines with  $100\Omega$  differential termination inside the module.


#### **Recommended Interface Circuit**

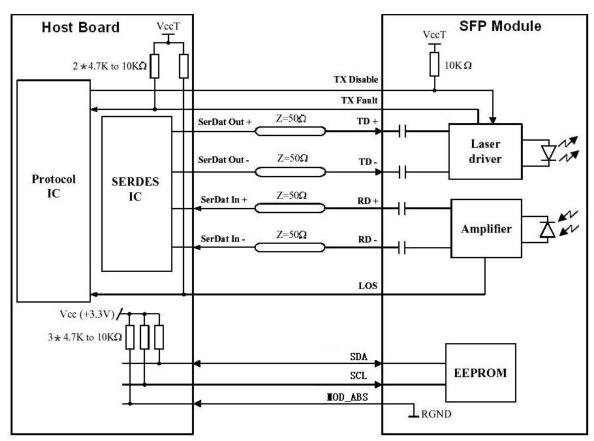



#### **Mechanical Dimensions**

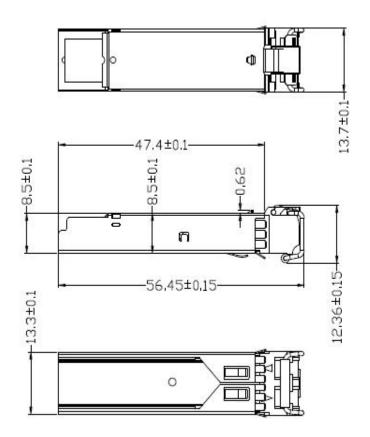





## **Ordering Information**

Part Number	Product Description
SFP-CWGExx-80C	CWDM, 1.25Gbps, LC, 80km, 0°C~+70°C, with DDM
SFP-CWGExx-80I	CWDM, 1.25Gbps, LC, 80km, -40°C~+85°C, with DDM

λC Wa	λC Wavelength Guide										
Code	λc	Unit	Code	λc	Unit	Code	λc	Unit	Code	λς	Unit
27	1270	nm	37	1370	nm	47	1470	nm	57	1570	nm
29	1290	nm	39	1390	nm	49	1490	nm	59	1590	nm
31	1310	nm	41	1410	nm	51	1510	nm	61	1610	nm
33	1330	nm	43	1430	nm	53	1530	nm			
35	1350	nm	45	1450	nm	55	1550	nm			

FIBER MALL CO., LIMITED Rev 1.1 PAGE 10 / 10